

# Taizhou Huali Plastic Co., Ltd.

## TEST REPORT

**REPORT NUMBER**  
180712003SHF-BP-2

**ISSUE DATE**  
2018-07-23

**PAGES**  
4

**DOCUMENT CONTROL NUMBER**  
LFT-APAC-SHF-OP-10a  
© 2018 INTERTEK



# Test Report

Issue Date: 2018-07-23 Intertek Report No. 180712003SHF-BP-2

Applicant: Taizhou Huali Plastic Co., Ltd.

Applicant Address: Zhangdian Industrial Zone, Jiangyan District, Taizhou City, Jiangsu Province.

Attn: Bonnie Yuan

**SUBJECT:** Performance testing  
RVP5GM/RVP5BBLO/RVP5FP/RVP5VB

Dear Sir,

This test report represents the results of our evaluation of the above referenced product(s) to the requirements contained in the following standards:

TEST METHODS AND STANDARDS
Refer to the next following Pages.

SAMPLE ID	MODEL	SPECIFICATION
S180712002SHF.002	/	/

SAMPLE RECEIEVED: 2018-07-09  
TESTED FROM: 2018-07-12 TO 2018-07-23

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

## Test Report

Issue Date: 2018-07-23

Intertek Report No. 180712003SHF-BP-2

### Test Items, Method and Results:

Test Item: Static load resistance

Test Method: ASTM F970-17

Conditioning: Condition the test specimens at  $(23 \pm 2)^{\circ}\text{C}$  and  $(50 \pm 5)\%$  relative humidity for at least 24 h

Test Condition:

Indenter diameter: 28.6 mm  
Total load applied: 250 psi  
Indentation time: 24 h  
Recovery time: 24 h

Test Result:


Residual Indentation	Result (mm)
Specimen 1	0.01
Specimen 2	0.01
Specimen 3	0.01
Average value	0.01
Max. value	0.01

## Test Report


Issue Date: 2018-07-23

Intertek Report No. 180712003SHF-BP-2

### APPENDIX: SAMPLE RECEIVED PHOTO

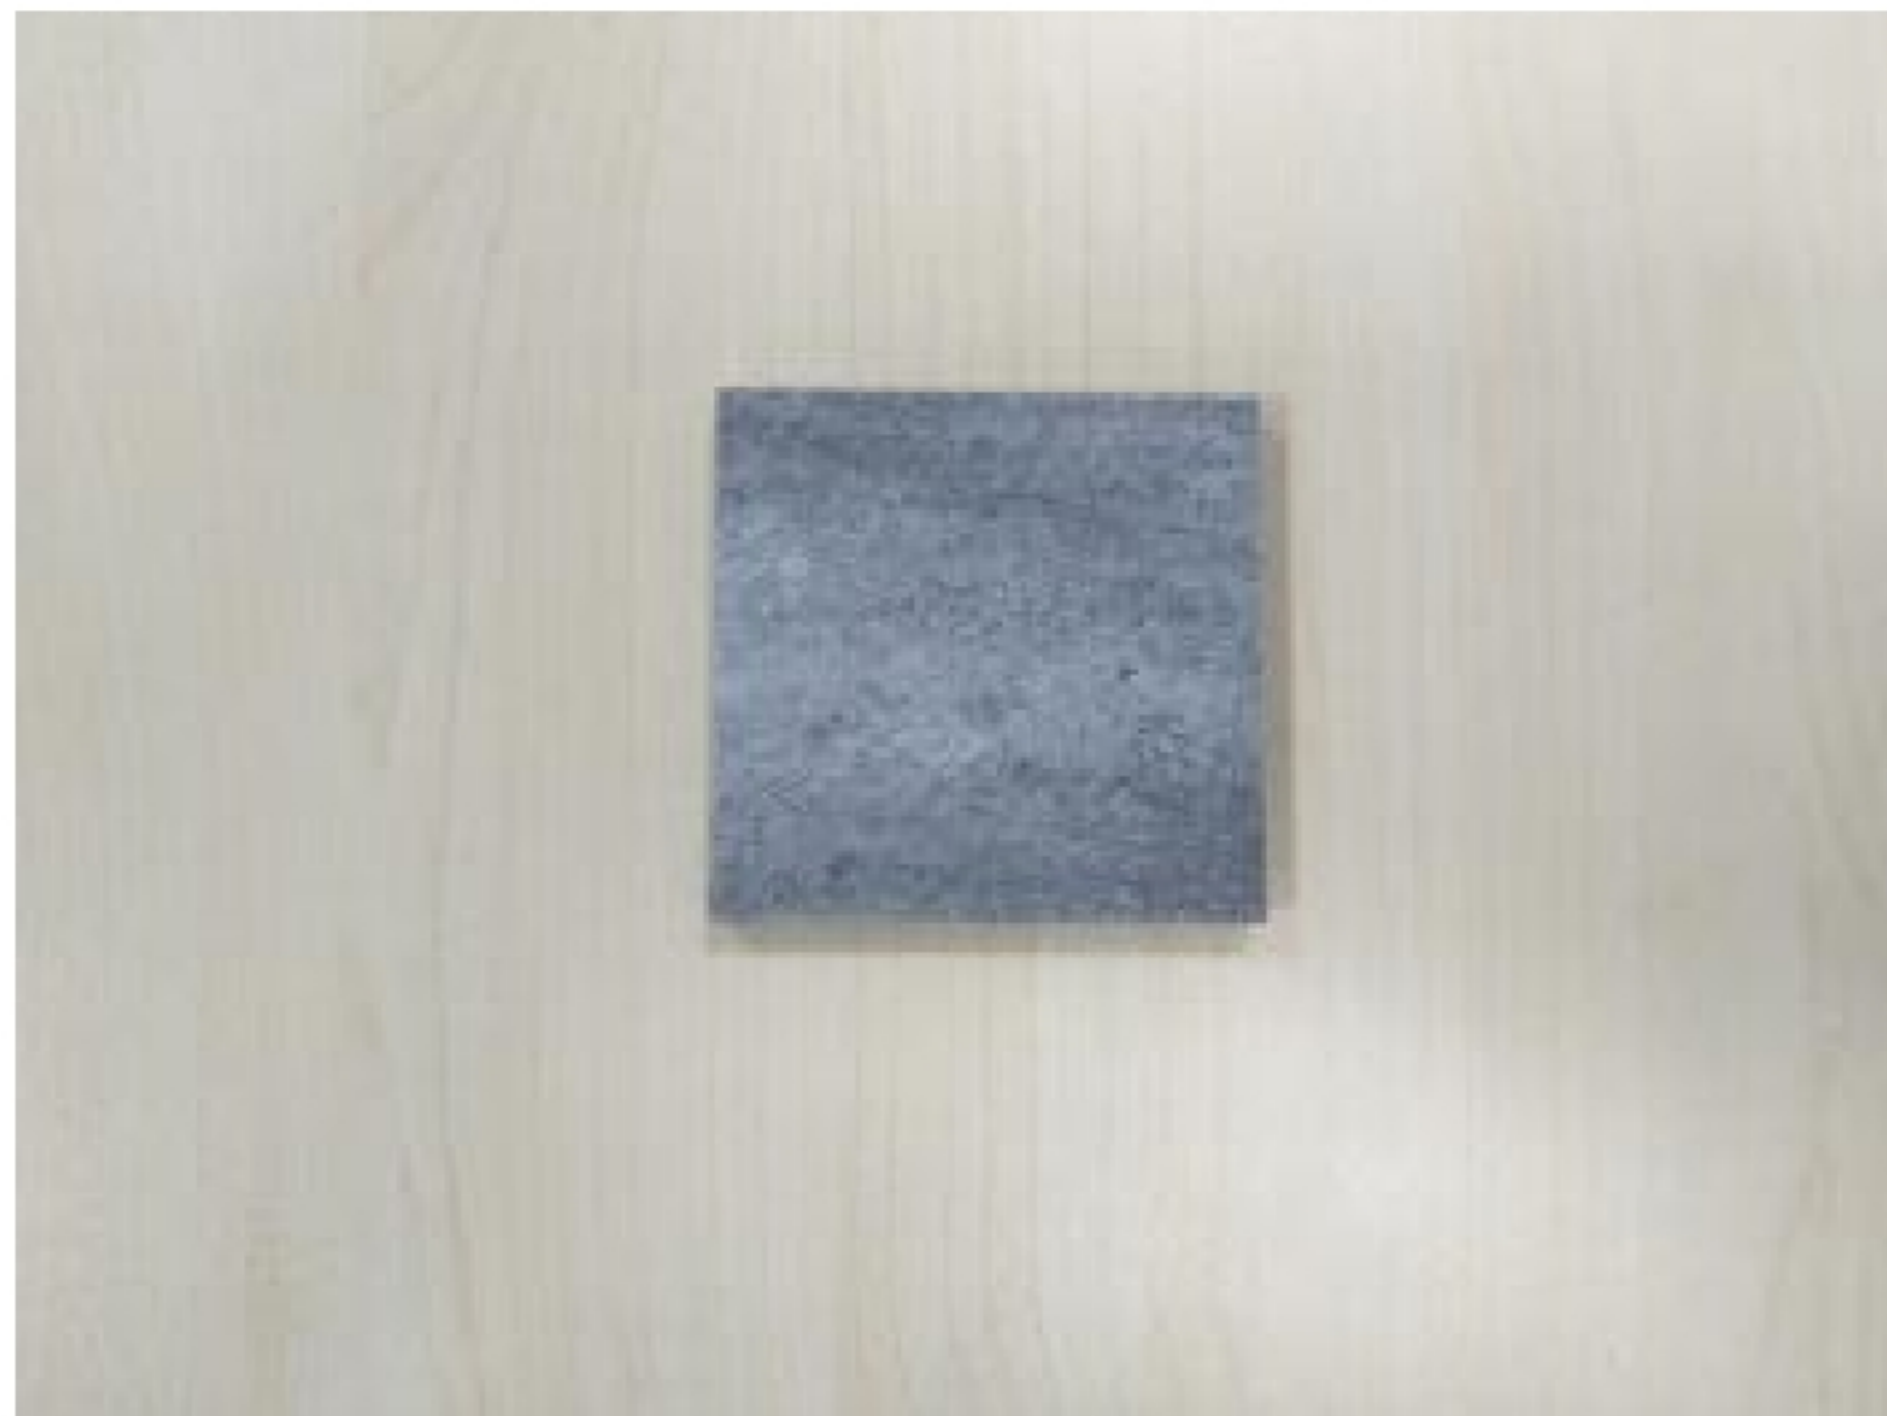

Front view(Test face)

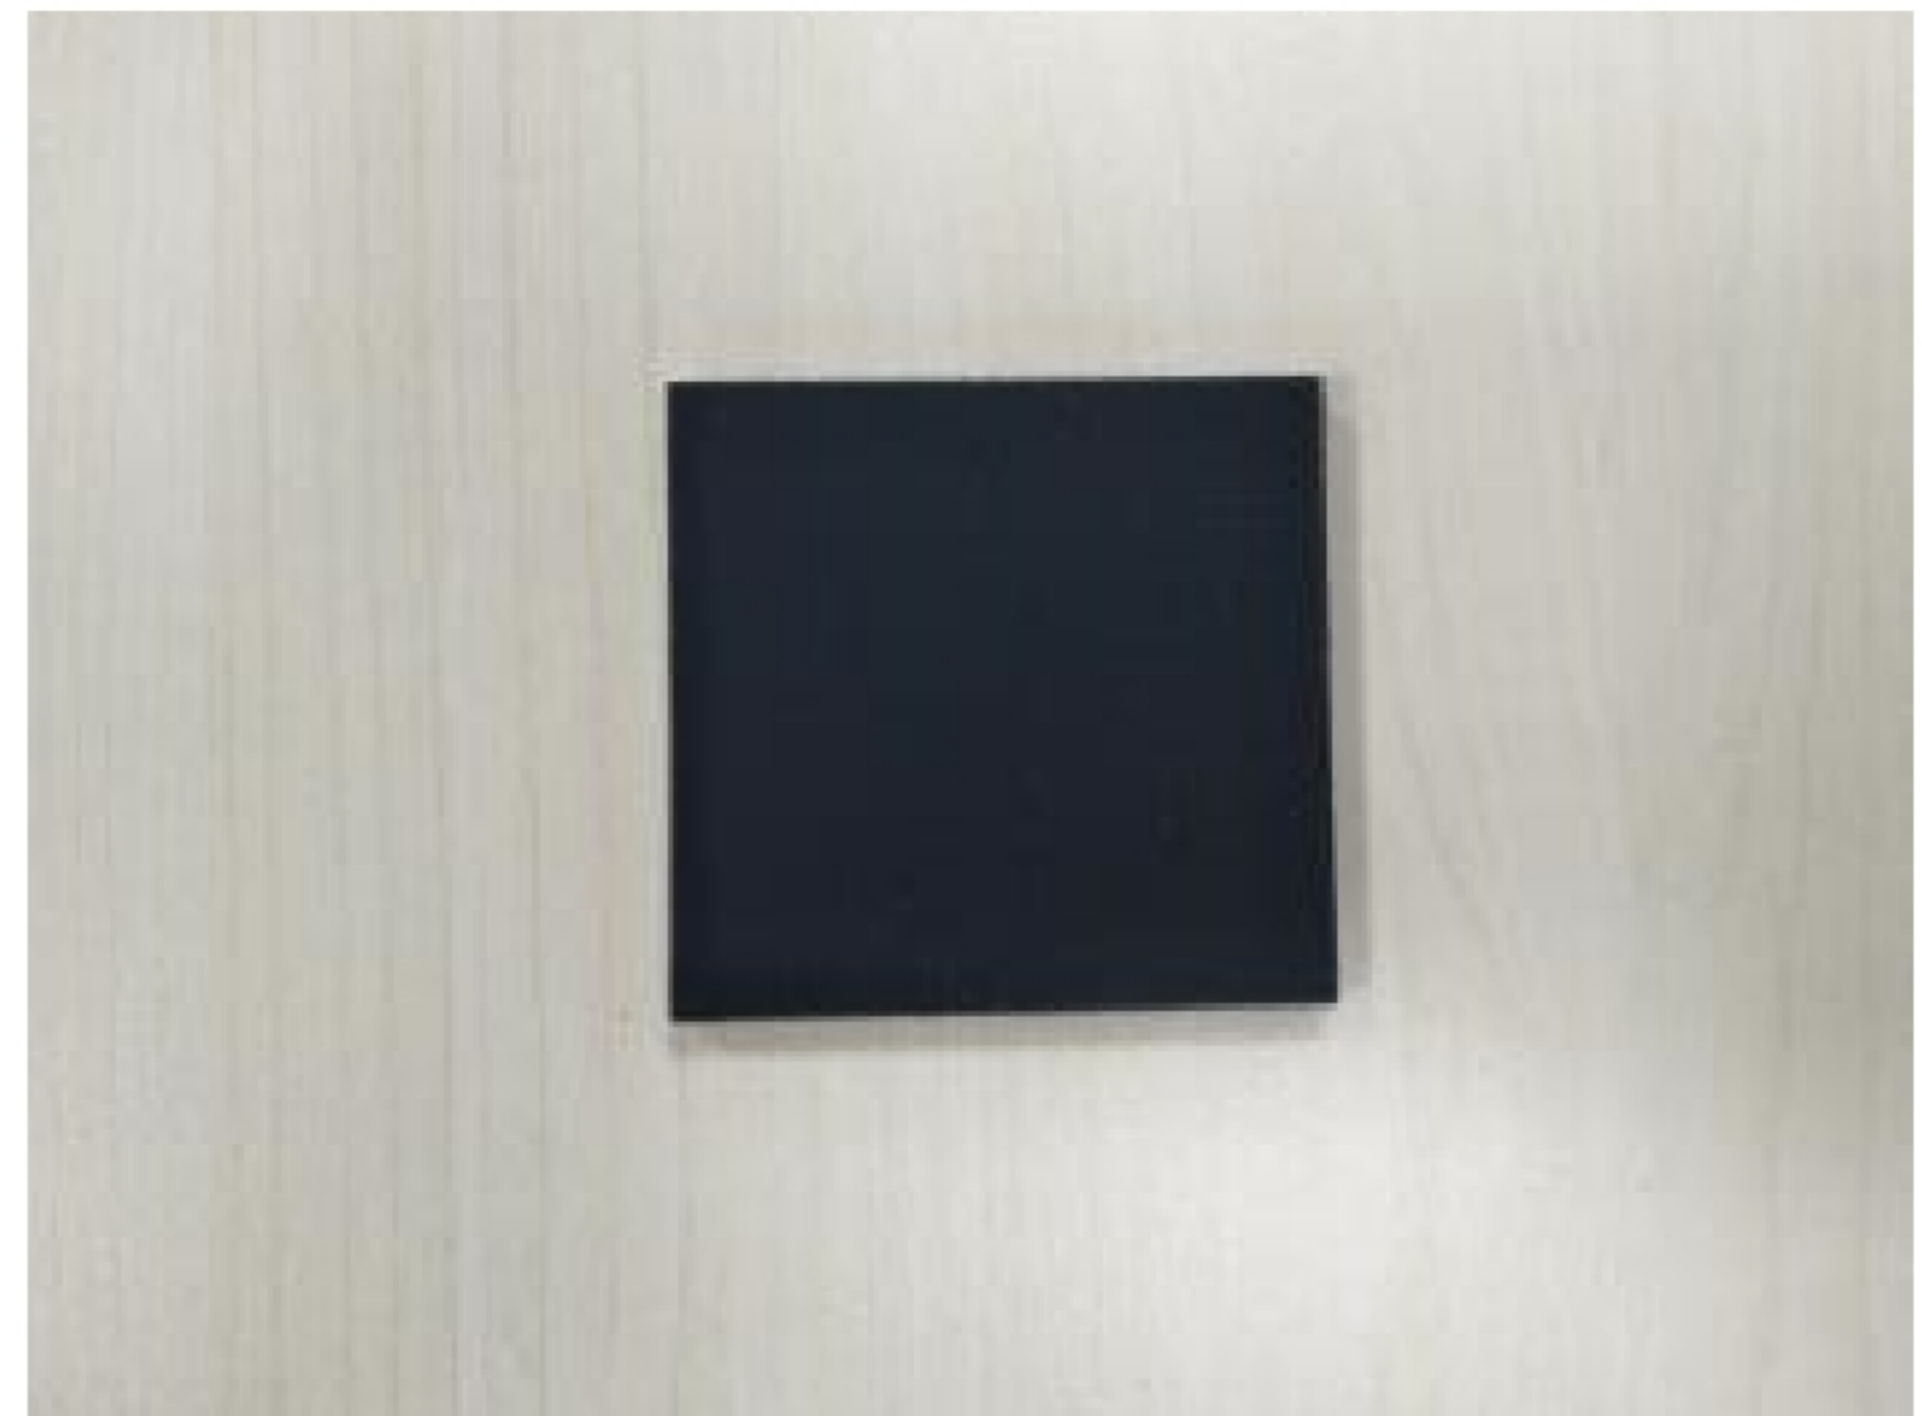

Back view

### REPORT AUTHORIZED

When signed with physical or electronic signature, the contents of this report have been prepared and approved per Intertek's quality process in accordance with ISO 17025.

*Tod Qian*  *Darren Fan*

---

Name: Tod Qian      Name: Darren Fan  
Title: Reviewer      Title: Project Engineer

### Revision:

NO.	DATE	CHANGES	AUTHOR	REVIEWER
180712003SHF-BP-2	2018-07-23	First issue	Darren Fan	Tod Qian